



BERRYALLOC®

VINYL PLANKS



SPIRIT



QUICK INSTALLATION | WATER PROOF

WWW.BERRYALLOC.COM





TECHNICAL DATA





PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS		GLUEDOWN 40
Total thickness	EN ISO 24346	2 mm
Wear layer	EN ISO 24340	0,40 mm
Total weight	EN ISO 23997	3,4 kg/m ²
Surface treatment		PUR
Usage classification	EN ISO 10874	23 - 32

TEST RESULTS

Underfloor heating	EN ISO 10874	suitable max. 27°C (80°F) / electrical floor heating systems: max 60 W/m
Castor chair	EN ISO 4918	pass
Fire resistance	EN ISO 13501-1	Bfl -s1
Chemical resistance	EN ISO 26987	OK
Residual indentation	EN ISO 24343-1	<0,10 mm
Sound reduction: Impact Sound	EN ISO 717-2 (Δ Lw)	2 dB
Dimensional stability	EN ISO 23999	<0,15%
Residential warranty		Lifetime
Formaldehyde	EN ISO 717-1	E1

Plank: 1219,2 x 184,1 mm - Box: 15 planks (= 3,37 m²) - Pallet: 95 boxes (= 319,85 m²)



COLOUR GUIDE



Cosy Natural 60001179



Grace Natural 60001165




Loft Natural 60001178



Grace Greige 60001166



French Light 60001155

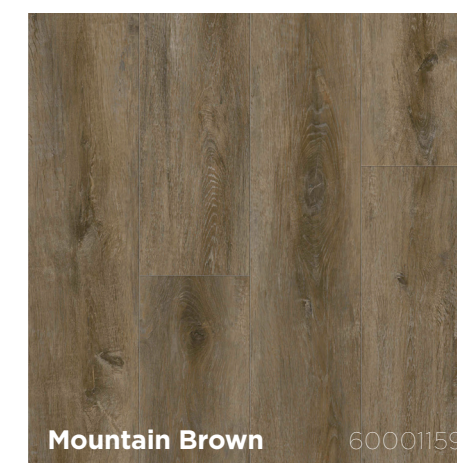

Mountain Brown 60001159



French Grey 60001156



Palmer Natural 60001163




Canyon Brown 60001161



Palmer Chocolate 60001164



Vintage Dark 60001162

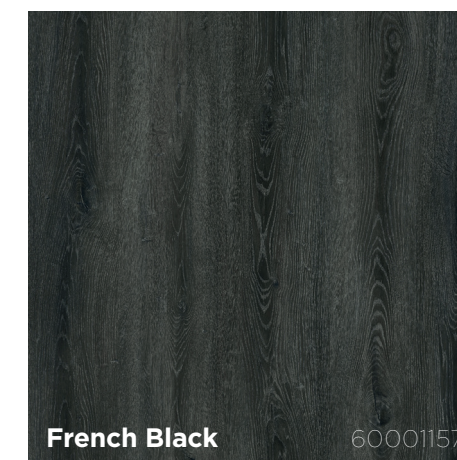

French Black 60001157



BERRYALLOC[®]
 LAMINATE ■ PARQUET ■ WALLS ■ VINYL PLANKS

www.berryalloc.com

BIG FLOORCOVERINGS NV
 RIJKSWEG 442
 8710 WIELSBEKE, BELGIUM
 Tel. +32 (0)56 67 66 11
 info@berryalloc.com




 Beaulieu
 International
 Group

